

MORE FROM WOOD.



Fitting Guide


The EGGER Advanced Glue Only System,
using EGGER Joint & Joist Adhesive only

The Egger


ADVANCED

Fitting
Guide

Suitable for use with solid timber joists and engineered joists. Please follow joist manufacturers' recommendations in conjunction with fitting EGGER Flooring grade chipboard (see **Fitting Notes** on page 2).

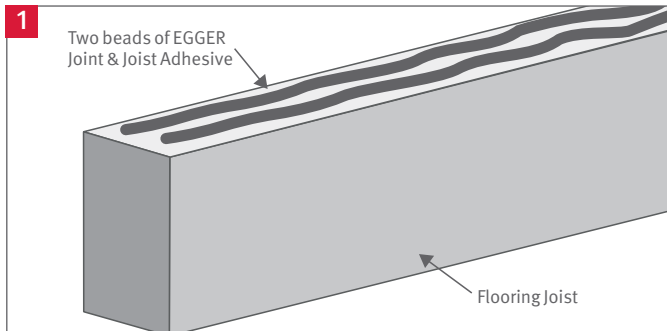


Apply two parallel beads of EGGER Joint & Joist Adhesive to the top of the joist along the first row of boards.

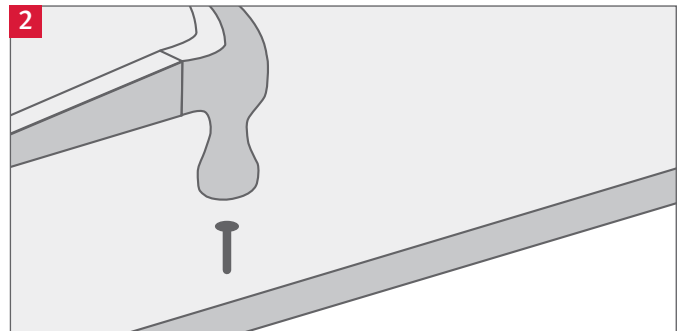

Lay the boards across the joist and fix the first row of boards with only one mechanical fixing (2.5 times the board thickness) per joist along the perimeter edge, minimum 8 mm from the joint edge.


All exposed fitting heads must be sealed with EGGER Joint & Joist Adhesive to prevent potential moisture ingress.

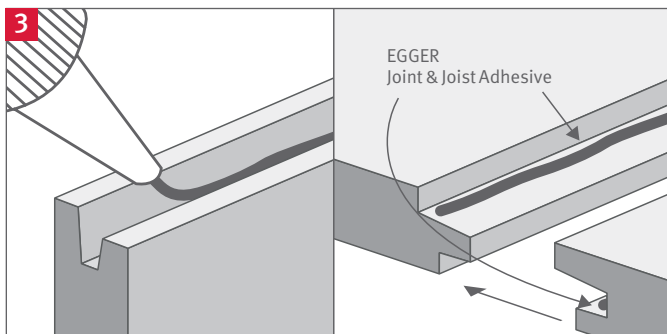


Apply EGGER Joint & Joist Adhesive directly to the groove and shoulder of the profile joint, continuing down the length of each board to ensure that the entire joint is bonded once the boards are butted tightly together. Adhesive should foam out of the board joint. This will enhance the protection of the joint. Excess adhesive should be left to dry.



Apply EGGER Joint & Joist Adhesive along the next row of joists and stagger the next row of panels by approximately half a board to form a brick bond laying pattern. Repeat steps (excluding step 2) and note that care should be taken when walking on newly laid boards.

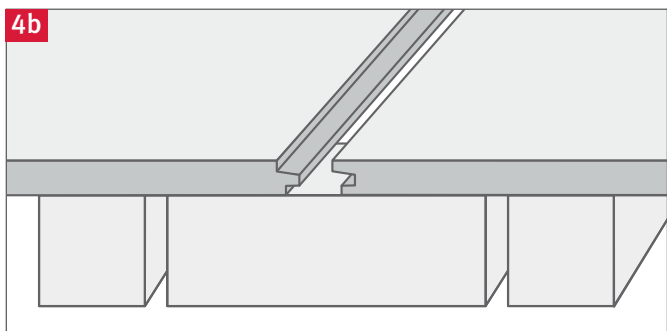

All short end joints should always fall on the centre of a secured joist, including perimeter edges. Where this is not the case, please refer to the relevant building guidelines.

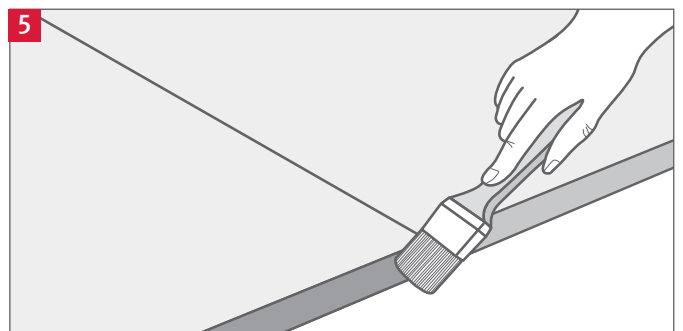

Exposed fitting heads, perimeter edges, cut edges and stairwells must be sealed using EGGER Joint & Joist Adhesive.

Once the building is watertight, excess adhesive can be removed with a scraper.

Fitting Notes

Joist Centres

On joists up to 450 mm centres, 18 mm or 22 mm panels may be used, but on joists up to 600 mm centres 22 mm panels must be used.

Expansion Provision

An expansion gap of 10 mm or 2 mm per metre run of floor, whichever is greater, should be left against all walls. Intermediate gaps (min. 10 mm) should be incorporated for floors in excess of 10 m long e.g. corridors.

Mechanical Fixings

The basic form of a mechanical fixing that we recommend is annular ring shank nails. All mechanical fixings must be no more than 8 mm from the joint edge. Mechanical fixings need to be 2.5 times the board thickness.

Along the short-end perimeter of the first row of boards, an additional mechanical fixing is needed every 300 mm.


The EGGER guidance on mechanical fixings is a minimum requirement for our system. Where floor designs/requirements differ, we recommend seeking joist manufacturers' guidance on fixings, so long as our minimum requirement is met.

Adhesive Coverage

Bonding the board to the joist and within the tongue & groove joint will typically require 1 bottle of EGGER Joint & Joist Adhesive per 6 boards (2400 mm × 600 mm).

EGGER Advanced Lifetime Guarantee

Use our Advanced Structural Flooring Boards, Joint & Joist Adhesive and one of our recommended fitting methods to be covered by our unique Lifetime Guarantee *.

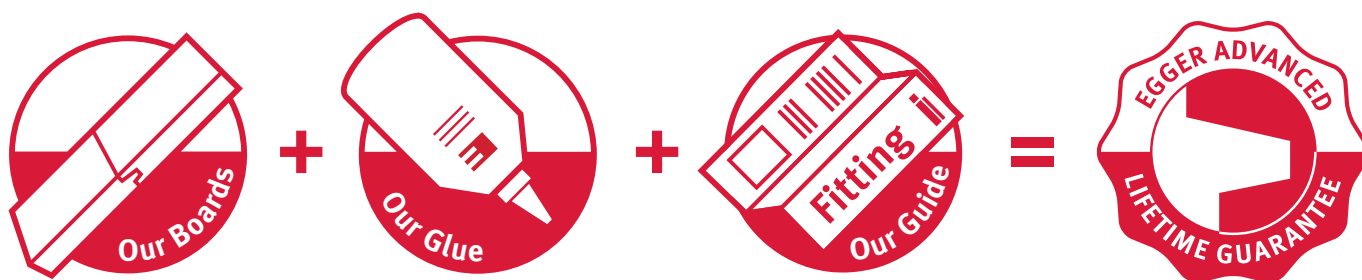

* Only applicable to the structural integrity of the EGGER Flooring Board.

For terms and conditions and further information on the EGGER Advanced Lifetime Guarantee, please visit www.egger.com/lifetime

www.egger.com/building

EGGER (UK) Limited

Anick Grange Road
Hexham
Northumberland
NE46 4JS

T 01434 602191

building.uk@egger.com

Building Product Services

Our Building Products Team are available to help with technical information, product enquiries and availability queries.

T 01434 613304

building.uk@egger.com

Online Technical Support

Visit our website for product and technical information: material safety data sheets, technical data sheets, certificates and test reports.

www.egger.com/building