



Frequently asked questions about EGGER DecoWall (FAQs)

How can the DecoWall surface be cleaned?

There is a light protective lacquer on the surface. Please only wipe with damp, if necessary with a little dishwashing detergent. Please do not use harsh cleaning agents for cleaning.

What is the maximum wall length?

When installing DecoWall panels, an expansion joint should be arranged every 10 m of wall length.

Can the DecoWall also be installed on edge?

Yes, the tongue and groove profile is the same on the long and short side. This means that the boards can be installed crosswise as well as on edge.

Can the DecoWall also be glued directly onto the wall surface?

Yes, if the surface is sufficiently level. The back of the board is sanded and provides a suitable, absorbent substrate. We recommend to use a permanently elastic parquet adhesive, which is not water-based (no dispersion adhesive). This prevents moisture from penetrating into the panel surface and causing warping.

Does EGGER also supply accessories?

Yes, we offer corner, folding and cover trims for the DecoWall in nine different decors and two different lengths.

How can minor damage and chipped edges be repaired?

Touch-up paint pens can be used to repair chipped edges, for example:

- Edding 8900 furniture marker
- Edding 8901 furniture repair wax set
- Lacquer touch-up pens e.g. from Bondex, Adler-Lacke, HOLZmarker and many more.
- Heinrich König GmbH (DE) gives the following recommendation for the DecoWall from the Kantifix touch-up paint pen:

DecoWall decor name	recommended touch-up pen color no. / color name
Natural Namur Spruce	106 / Dark elm
Light Namur Spruce	RAL 1019 grey beige
Natural Annaba Oak	126 / Limba
Laxfield Oak	RAL 1019 grey beige
Loveland Oak	140 / Natural oak
Esbjerg Elm	156 / middle beech

Rovigo Concrete	RAL 7040 / window grey
Wismar Brick	119 / Pear medium
Narva slate	RAL 7031 / blue-grey

How to install the DecoWall?

You can find detailed installation instructions on the website www.egger.com/decowall.


There is also an installation film on YouTube [DecoWall-installation](#).

What does the N+F profile look like and what dimensional allowances need to be taken into account when cutting to size?

The DecoWall tongue and groove profile is asymmetrically shaped to allow invisible fastening with countersunk screws.

The format specification of the DecoWall with 1250 mm x 660 mm is the cover dimension. The dimensional allowance for the gross dimension is 15mm. The length of the tongue is 14 mm.

When cutting the DecoWall panels to size, the necessary allowances or deductions for the tongue and groove profile must be taken into account. The dimensions of the profile are shown in the illustration:

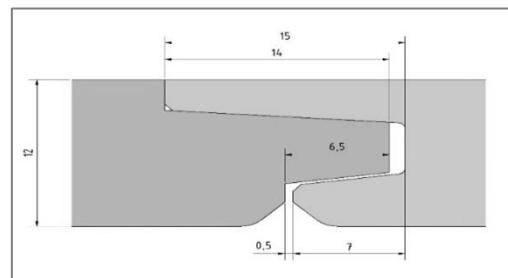

Are the DecoWall surfaces lightfast?

Yes, the decors were tested in accordance with the applicable testing standard using the XENON test and, with measured values between 4–5, achieved the classification 4 (grey scale) required by the standard.

IMPORTANT: The standard test simulates indoor use behind window glass.

Before grey scale was introduced, the so-called blue scale was used for evaluation. Level 6 blue scale corresponds to level ≥ 4 grey scale.

Can DecoWall panel used for the wall cladding / ceilings in bathrooms?

The climatic situation in a bathroom can vary greatly. EGGER therefore does not approve the use of DecoWall for bathrooms without restrictions.

According to the technical data sheet and the declaration of performance, the DecoWall can be used in an environment with increased relative humidity of air. In service class 2 (humid conditions), the relative humidity may be up to max. 85%. This ensures that the moisture content of the DecoWall panels does not exceed 18%.

"Moisture-resistant gluing" does not mean that DecoWall is permanently resistant to the effects of liquid water

For this reason, the possibility of constantly recurring dampness due to water splashes near the showers / washbasins or water vapor condensation on the panel surface after bathing or showering must be ruled out.

DecoWall panels can be installed in well-ventilated bathrooms only under the above-mentioned conditions.

What should I bear in mind when installing DecoWall behind a stove?

The DecoWall panels must be installed at least 5 cm away from the heating pipe. The pipe itself is fed through the wall in a non-combustible penetration seal. The wall duct is covered with a suitable sleeve..

A minimum distance of 40 cm from the wall is generally recommended for the stove. As this distance rule and any other regional regulations must be observed, a chimney sweep or other specialist should also be consulted.

For further information see i.e.:

<https://stovefitterswarehouse.co.uk/pages/rules-for-wood-burning-stoves>