

ENVIRONMENTAL-PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2

Owner of the Declaration	Fritz EGGER GmbH & Co. OG
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-EGG-20200251-IBC2-EN
Issue date	29.07.2021
Valid to	09.05.2027

EGGER Eurodekor - Melamine Faced Chipboard
Fritz EGGER GmbH & Co. OG

www.ibu-epd.com | <https://epd-online.com>



ECO PLATFORM

EPD
VERIFIED

1. General Information

Fritz EGGER GmbH & Co. OG

Programme holder

IBU – Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

Declaration number

EPD-EGG-20200251-IBC2-EN

This declaration is based on the product category rules:

Wood based panels, 01.08.2021
(PCR checked and approved by the SVR)

Issue date

29.07.2021

Valid to

09.05.2027



Dipl.-Ing Hans Peters
(chairman of Institut Bauen und Umwelt e.V.)



Florian Pronold
(Managing Director Institut Bauen und Umwelt e.V.)

EGGER Eurodekor - Melamine Faced Chipboard

Owner of the declaration

Fritz EGGER GmbH & Co. OG
Weiberndorf 20
6380 St. Johann in Tirol
Austria

Declared product / declared unit

1
m² EGGER Eurodekor melamine faced chipboard (11.57 kg/m²) with a
moisture content of 6
%.

Scope:

This document refers to coated chipboard
EGGER Eurodekor, produced with an average glue mix at the site in
Brilon,
Germany.


The production conditions in Brilon are
comparable to those of the other plants. They correspond to the
technologies
and standards used in all locations.

The owner of the declaration shall be liable for the underlying information
and evidence; the IBU shall not be liable with respect to manufacturer
information, life cycle assessment data and evidences.

The EPD was created according to the specifications of EN 15804+A2. In
the following, the standard will be simplified as *EN 15804 bezeichnet*.

Verification

The standard EN 15804 serves as the core PCR	
Independent verification of the declaration and data according to ISO 14025:2011	
<input type="checkbox"/>	internally
<input checked="" type="checkbox"/>	externally



Matthias Klingler,
(Independent verifier)

2. Product

2.1 Product description/Product definition

Coated chipboards (Eurodekor) are board-shaped wood-based materials according to

.
EN 312:2010-09, Particleboards - Specifications and

.
EN 14322:2017-03, Wood-based panels - Melamine faced boards for interior uses - Definition, requirements and classification.

The decorative pattern of a melamine faced chipboard is achieved by means of printed decor paper. A corresponding texture can be applied to the surface in the course of the pressing.

The board types are differentiated in application according to two criteria: according to load-bearing and non-load-bearing elements and according to use in dry or moist areas:

P1:
General purpose boards for use in dry conditions

P2:
Board for interior fittings (including furniture) for use in dry conditions

P3:
Boards for non-load-bearing purposes for use in humid conditions

P4:
Boards for load-bearing purposes for use in dry conditions

P5:
Load-bearing boards for use in humid conditions

P6:
Heavy duty load-bearing boards for use in dry conditions

The use class P7 described in the standard

is not produced by EGGER.

The average product considered has a thickness of 17.6 mm. This was calculated over the total quantities produced at the Brilon plant according to volume share. Included were the

quantities of all boards thicker than 8 mm were included. The production of boards 8 mm and thinner falls into the category of thin chipboard and is not declared in this study.

The average glue mix across all board types is considered. The production conditions of the Brilon site are comparable to those of the other plants. They correspond to the technologies and standards used in all locations. Regulation (EU) no. 305/2011 (CPR) applies to bringing the product into circulation in the EU/EFTA (with the exception of Switzerland). The product requires a declaration of performance declaration taking into account *EN 13986:2004+A1:2015, Wood-based panels for use in construction – Characteristics, evaluation of conformity and marking* and the CE marking.

2.2 Application

The area of application of the melamine faced

chipboard EGGER Eurodekor is mainly used in

decorative interior design and in furniture construction. It is

used in residential and project furnishings. EGGER Eurodekor E1E05 TSCA P2 CE and EGGER Eurodekor JP F 0.3 (F****) are used especially for furniture and interior design with increased requirements for low formaldehyde emissions. For

increased fire protection there is EGGER Eurodekor Flammex E1E05 P2 CE.

2.3 Technical Data

The technical requirements for chipboard in the use classes P1-P6 produced by EGGER are specified in the standard *EN 312:2010*. Further definitions, requirements and classifications of melamine faced boards for interior use such as surface properties and dimensional tolerances are provided by the standard *EN 14322:2017-03*. Detailed information can be found in the technical data sheets.

Structural engineering data

Name	Value	Unit
Gross density EN 323	655	kg/m ³
Grammage thickness 17.6 mm	116	kg/m ²
Bending strength (longitudinal) EN 310	85 - 20	N/mm ²
E-module (longitudinal) EN 310	1200 - 3150	N/mm ²
Material dampness at delivery	5 - 13	%
Tensile strength right-angled	±2.0	mm/m
Thermal conductivity EN 13986	12	W/(mK)
Water vapour diffusion resistance factor EN 12524 in µ-dry	50	-
Sound absorption EN 13986	-	%
Formaldehyde emissions vary by product	E1)*1, E1E05)*2, TSCA)*3, F****)*4	µg/m ³
Limit deviation density relative to mean value EN EN 324	±10	%
Thickness tolerance sanded boards EN 324	±0.3	mm
Length and width tolerance EN 324	±5	mm
Edge straightness tolerance EN 324	±1.5	mm
Perpendicularity tolerance EN 324	±2.0	mm

*1) E1: According to *EN 13986+A1:2015-04* formaldehyde class E1, a limit value of 8 mg HCHO/100 g absolutely dry board may not be exceeded by the perforator method according to *ISO 12460-5*.

*2) E1E05: According to the *ChemVerbotsV*, coated and uncoated wood-based materials may not be placed on the market in DE if the compensation concentration of formaldehyde caused by the wood-based material in the air of a

test room according to *EN 16516* exceeds 0.1 ml/cbm (ppm).

*3) TSCA: According to the US Toxic Substances Control Act (*TSCA Title VI*), chipboard may not exceed 0.09 ppm according to test chamber method *ASTM E 1333*.

*4) F****: According to Japanese standard *JIS A 5908*, the uncoated chipboard complies with the limit (mean) of ≤ 0.3 mg HCHO/L according to desiccator method *JIS A 1460*.

Performance values of the product as stated in the declaration of performance in relation to its essential characteristics according to *EN 13986+A1:2015-04, Wood-based panels for use in construction – Characteristics, evaluation of conformity and marking* (not part of the CE marking).

2.4 Delivery status

Standard size [mm]: 5610 x 2070 & 2800 x 2070

Thickness range [mm]: 8 to 40

2.5 Base materials/Ancillary materials

Preliminary products:

Raw chipboards with a thickness between 8 and 40 mm and an average density of 655 kg/m³ consist of (information in weight % per 1 m³ of production):

- **approx. 84-86 % wood weight:** Fresh wood from thinning measures and sawmill residues, mainly spruce and pine, are used for the production of chipboard. Up to 30 % of the raw material is covered by recycled wood, which is materially utilised.

- **approx. 4-7 % water**

- **approx. 8-10 % UF glue:** consisting of urea-formaldehyde resin.

Through polycondensation, the aminoplastic adhesive hardens completely in the pressing process.

< 1 % PMDI glue (polymer diphenylmethane diisocyanate): MDI (diphenylmethane - diisocyanate), a polyurea precursor that is converted into PUR (polyurethane) and polyurea during board production, is used. These serve the purpose of bonding the wood fibres.

<1 % paraffin wax emulsion: A paraffin wax emulsion is added to the recipe during application as a water repellent (improves moisture resistance).

For the coating:

- Decor papers: with a grammage of 60 -120 g/m²

- Melamine formaldehyde resin: amino-plastic resin for the impregnation of decor paper for lamination; the resin hardens inside the press into a hard and wear-resistant surface.

The product contains substances on the *ECHA List* of substances of very high concern (16.01.2020) above 0.1% by weight: no.

The product contains other CMR substances of category 1A or 1B that are not on the candidate list, above 0.1 by weight % in at least one sub-product: no.

Biocidal products have been added to this building product or it has been treated with biocidal products (this refers to treated goods within the meaning of the Biocidal Products Regulation (EU) No. 528/2012): no.

2.6 Manufacture

Production of the rawboards (EGGER Eurospan):

1. Wood preparation
 - Roundwood chipping
 - Chip preparation
 - Residual wood preparation
2. Drying the chips to approximately 2 – 3 % residual moisture
3. Sorting the chips
4. Applying glue to the chips
5. Spreading the glue-coated chips onto a forming belt
6. Pressing the chip cake in a continuously operating hot press (ContiRoll)
7. Formatting of the raw boards
8. Cooling the rawboards in star coolers
9. Sanding the upper and lower sides
10. Stacking into large stacks.

All scraps produced during production (trimming, cutting and milling scraps) are fed back into the production process.

Production of impregnates for coating:

1. Processing the base paper
2. Addition of impregnation resins (MUF) in the plant
3. Drying the impregnated paper in heated dryers
4. Formatting the endless paper by means of a cross-cutter
5. Stacking the formatted sheets on pallets

Coating the chipboard (EGGER Eurodekor):

1. Laying the impregnated papers onto the upper and lower sides of the rawboard
2. Pressing the board in the hot press with variously structured pressing sheets
3. Sorting by quality and stacking
4. Acclimatisation phase of up to 14 days

All waste generated in the course of the coating is used thermally within the plant.

The quality management system is implemented and certified according to the requirements of *ISO 9001*.

2.7 Environment and health during manufacturing

Environmental management at EGGER starts with state-of-the-art technologies: The plants are equipped with state-of-the-art wastewater, noise protection and air purification systems.

The EGGER environmental management system runs through the entire company, enabling efficient implementation of environmental objectives and the integration of environmental aspects into work processes. The objective is to ensure compliance with legislation, to avoid or reduce negative operational environmental impact, and to continuously improve environmental performance.

2.8 Product processing/Installation

EGGER Eurodekor can be sawed and drilled with regular (electrical) machines. Hard metal tipped tools are recommended, particularly in the case of circular saws. Wear a respiratory mask if using hand tools without a dust extraction device. Detailed information and processing recommendations are

available at: www.egger.com

2.9 Packaging

Wooden chipboard and corrugated cardboard are used for covering, as well as PET packaging straps

2.10 Condition of use

The component materials of coated chipboard comply in terms of their proportions to those of the basic material composition described in section 2.5.

During compression, the aminoplast resin (UF) is cross-linked three-dimensionally by an irreversible polycondensation reaction under the application of heat.

The bonding agents are chemically stable and permanently bonded to the wood.

2.11 Environment and health during use

Environmental protection: When the described products are used properly in accordance with the area of application, there is no risk of water, air or ground contamination according to the current state of knowledge.

Health aspects: According to the current state of knowledge, no health hazards or adverse effects are to be expected from normal use of coated chipboard in accordance with its intended purpose. Natural wood constituents may be released in small quantities. With the exception of small amounts of formaldehyde that are not a hazard to health, no emissions of harmful

substances are detectable.

2.12 Reference service life

The service life of Eurodekor boards depends on the area of application in the specific project, taking into account the use class according to *EN 1995-1-1, DIN 68800-2* and appropriate maintenance. Resistance in use is defined by the use classes (P1 - P7) (see 2.1).

For general fixtures/furnishing systems, the *BBSR Table "Useful lives of components for life cycle analyses according to the BNB"* gives a range of 10 to 40 years (KG 371-378). These useful lives are based on empirical values and are used to develop forecast scenarios for further LCAs. No binding statements (warranties, construction contracts, expert opinions, etc.) can be derived from the data. Description of the influences on the ageing of the product when applied in accordance with the rules of technology.

2.13 Extraordinary effects

Fire

Coated chipboard EGGER Eurodekor has the following fire behaviour according to *EN 13501-1*:

Fire protection

Name	Value
EGGER Eurodekor	
Building material class	D (normal flammability)
Burning droplets	d0 (no drip off / fall off)
Smoke gas development	s2 (limited smoke development)
EGGER Eurodekor Flammex:	
Building materials class	B (low flammability)
Dropping while burning	d0 (no drip off / fall off)
Smoke development	s1 (no / hardly any smoke development)

Change of the aggregate state (burning drip off/fall off): Burning dripping is not possible, as coated chipboard does not become liquid when heated.

Water

No hazardous water contaminants are washed out. Chipboard is not resistant to continuous water influence, damaged parts, however, can easily be locally replaced.

Mechanical destruction

The fracture pattern of a chipboard shows a relatively brittle behaviour, whereby sharp edges can occur at the fracture edges of the boards (risk of injury). The resistance to mechanical impact corresponds to the respective board types P1 to P6.

2.14 Re-use phase

Re-use / Recycling: EGGER Eurodekor chipboard can easily be collected separately in the case of selective dismantling when a building is converted or ends its use phase, and can be re-used or recycled for purposes other than its original application. Exceptions to this are boards that have been bonded over their surface.

Energy generation (in approved facilities): With the high average calorific value of approximately 16.7 MJ/kg an energy utilisation for the generation of process energy and electricity (combined heat and energy power plants) from chipboard residues as well as chipboard from the construction site as well as from demolition measures are to be preferred over dumping.

2.15 Disposal

Construction site waste of EGGER Eurodekor, and waste from demolition projects, should primarily be used in materials. If this is not possible, they must be utilised for energy generation instead of dumping (waste code according to the *EWC: 170201/030105*).

The transport packaging materials, chipboard and PET packaging straps can be recycled as long as they are collected separately. In some cases, external disposal can be arranged with the manufacturer.

2.16 Further information

Detailed information and recommendations are available at www.egger.com.

3. LCA: Calculation rules

3.1 Declared Unit

This environmental product declaration is based on a declared unit of 1 m³ EGGER Eurodekor coated chipboard with an average raw density of 11.57 kg/m² and a delivery moisture of approximately 6 %.

Specification of the declared unit

Name	Value	Unit
Declared unit	1	m ²
conversion factor	11.57	-
Raw density	655	kg/m ³
Grammage	11.57	kg/m ²
Wood moisture at delivery	6	%
Layer thickness	0.0177	m

EGGER Eurodekor coated chipboard is made at the Brilon (DE) plant. The surface weight of the Eurodekor coated chipboard was calculated surface weighted. This is based on the averaging of raw chipboard, which was done according to dimensional weight. The glue mix of the products was also included (< 1 % PMDI glue) in the calculation as a weighted average. The average for the impregnation used for coating was based on annual production.

3.2 System boundary

The LCA of the average EGGER Eurodekor coated chipboard includes a cradle-to-gate consideration of the occurring environmental impact with the modules C1-C4 and module D (A1-A3, +C, +D). The following life cycle phases are taken into account in the analysis:

Module A1– A3 | Production stage

The production stage includes the expenses of the raw material supply (logs, scrap wood, sawdust, glue system, auxiliary materials, etc.) as well as the associated transports to the production site in Brilon. Within the plant boundaries, the log yard, wet chip preparation, drying, gluing, spreading, pressing, the sanding line up to the warehouse and shipping are taken into account. The Eurodekor products are also finished by applying an impregnation in the short-cycle presses and then packaged. Thermal and electrical energy, compressed air and water are provided by central suppliers at the Brilon site. The majority of the

electrical energy used is obtained from the German power grid. Both internal wood waste and scrap wood sourced externally are used in the in-house biomass power plant. The system boundary for the scrap wood used in the production is set after sorting and chopping. It is assumed that the end of the waste status has been reached. The system boundary for secondary raw materials according to EN 15804 applies.

Module C1 | Dismantling / Demolition

Manual dismantling was assumed for the Eurodekor coated chipboard. The associated efforts are negligible, which means that no environmental impact from the dismantling of the products is declared.

Module C2 | Transport to waste treatment

Module C2 includes transport to waste treatment. For this purpose, transport by lorry over a distance of 50 km is used as a representative scenario.

Module C3 | Waste processing

Chopping after product disassembly is considered in module C3. The wood products and with them the material-inherent properties leave the product system as secondary fuel in module C3.

Module C4 | Disposal

The scenario used declares the energy recovery of the wood products, which means that no environmental impact from the waste treatment of the products in C4 are to be expected.

Module D | Credits and charges beyond the limits of the product system

The energy utilisation of the product at the end of its life cycle is described in Module D, including energetic substitution potentials as a European average

3.3 Estimates and assumptions

Assumptions and estimates are used in the absence of a representative background data set to represent the environmental impact of certain raw materials. All assumptions are supported with detailed documentation and correspond to the best possible representation of reality given the available data. A generic data set from the *GaBi* Database for spruce roundwood was used as background data set for roundwood. A large part of the wood processed by EGGER represents coniferous fibrewood. For other wood types used, the data set for spruce roundwood should be considered as an approximation.

In the case of missing measurement data for emissions from the presses, these values were estimated based on the publication by *Rüter & Diederichs 2012*.

3.4 Cut-off criteria

All inputs and outputs for which data are available and from which a significant contribution can be expected are included in the LCA model. Missing data are populated when a data basis is available using conservative assumptions for average data or generic data and are documented accordingly. Only data with a contribution of less than 1% were removed. Neglecting these data can be justified by the limited effect to be expected. Thus, no processes, materials or emissions were neglected that are expected to make a significant contribution to the environmental impact of the

products under consideration. It can be assumed that the data were recorded in full and that the total sum of the neglected input flows does not exceed 5 % of the energy and mass input. Expenses for machinery and infrastructure were not taken into account.

3.5 Background data

Secondary data are included to represent the background system in the LCA model. These are taken, on the one hand, from the *GaBi* database 2020, SP40 and, on the other hand, from recognised literature sources, such as *Rüter & Diederichs 2012*.

3.6 Data quality

The data was collected via spreadsheets specifically created by EGGER. Questions were answered through an iterative process in writing via e-mail, phone, or in person. Given the intense discussion concerning a representation of material and energy flows in the company that is as close as possible to reality, led by EGGER and Daxner & Merl, the high quality of collected foreground data can be assumed. A consistent and uniform calculating procedure was applied in line with *ISO 14044*. When selecting the background data, the technological, geographical, and time-related representativeness of the data basis was taken into consideration. When specific data was missing, generic data sets or a representative average were used. The *GaBi* background data sets are not older than ten years.

3.7 Period under review

As part of the collection of the foreground data, the life cycle was recorded for the production year 2018. The data are based on the annual volumes used and produced.

3.8 Geographic Representativeness

Land or region, in which the declared product system is manufactured, used or handled at the end of the product's lifespan: Germany

3.9 Allocation

The carbon dioxide content and primary energy content of the products have been balanced on the basis of their inherent material characteristics in line with underlying physical relationships. Allocation within the forestry chain is based on the publication of *Hasch 2002* and its update by *Rüter & Albrecht 2007*.

For board production, sawing by-products were also used in addition to roundwood. A price allocation

according to Rüter & Diederichs 2012 and according to the primary data for the sawmill in Brilon was used to calculate the environmental impact of these by-products from the sawing system. The thermal and electrical energy generated in the combined heat and power systems is allocated according to exergy.

4. LCA: Scenarios and additional technical information

Characteristic product properties Information on biogenic carbon

The biogenic carbon content quantifies the amount of biogenic carbon in the declared building product.

Information describing the biogenic carbon content at the plant gate

Name	Value	Unit
Biogenic carbon content (in the product)	4.9	kg C/m ²
Stored carbon dioxide (in the product)	17.8	kg CO ₂ -Äq./m ²

Since the end-of-life of the product packaging is not declared in module A5, its carbon uptake is not included in modules A1-A3.

The following technical information represents the basis for the declared module or can be used for the development of specific scenarios in the context of a building evaluation if modules are not declared (MND).

Biogenic carbon in the product

The biogenic carbon content quantifies the amount of biogenic carbon in the declared building product.

Name	Value	Unit
Biogenic carbon content (in the product)	4.9	kg/m ²
Stored carbon dioxide (in the product)	17.8	kg/m ²

Since the end-of-life of the product packaging is not declared in module A5, its carbon uptake is not included in modules A1-A3.

Integration into building (A5)

The end-of-life of product packaging is not declared in module A5.

Name	Value	Unit
Packaging (PET)	0.0004	kg/dekl. Unit
Packaging (wood)	0.354	kg/dekl. Unit
Packaging (Kraftliner)	0.0085	kg/dekl. Unit

In case a **reference service life** according to applicable ISO standards is declared then the assumptions and in-use conditions underlying the determined RSL shall be declared. In addition, it shall be stated that the RSL applies for the reference conditions only.

The same holds for a service life declared by the manufacturer. Corresponding information related to in-use conditions needs not be provided if a service life taken from the list on service life by BNB is declared.

Reference utilisation duration

The product is tested according to the normative product requirements. When used according to the rules and

3.10 Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to EN 15804 and the building context, respectively the product-specific characteristics of performance, are taken into account. Zur Berechnung der Ökobilanz wurde die GaBi Hintergrunddatenbank (DB 2020, SP 40) in der GaBi-Software-Version 9 verwendet

the state of the art, the reference service life corresponds to 10-40 years. These periods are to be used for further calculations and do not constitute manufacturer's guarantees.

Name	Value	Unit
Reference service life	10 - 40	a
Life Span (according to BBSR)	10 - 40	a
Life Span (according to BBSR)	10 - 40	a
Declared product properties (at the gate) and finishes	Conforms to EN 312	-
Design application parameters (if instructed by the manufacturer), including the references to the appropriate practices and application codes	Service life depending on intended use	-
An assumed quality of work, when installed in accordance with the manufacturer's instructions	see the processing instructions EGGER Eurodekor/ Eurodekor Plus" available on www.egger.com	-
Outdoor environment, (for outdoor applications), e.g. weathering, pollutants, UV and wind exposure, building orientation, shading, temperature	not relevant, given use in interiors	-
Indoor environment (for indoor applications), e.g. temperature, moisture, chemical exposure	dry furniture and interior design	-
Usage conditions, e.g. frequency of use, mechanical exposure	Conforms to EN 312	-
Maintenance e.g. required frequency, type and quality and replacement of components	regular visual inspection and replacement in case of damage	-

End of life cycle (C1-C4)

Name	Value	Unit
For energy recovery [balance moisture 12%]	12.2	kg/m ²

Reuse, recovery and recycling potential (D), relevant scenarios

Name	Value	Unit
Net flow in module D [balance moisture 12 %]	11.5	kg/m ²
Moisture during thermal reuse	12	%
Processing rate	100	%
Efficiency of the system	61	%

The product reaches the end of the waste status after it is removed from the building, transported for preparation, and the chipping of the product. For the end of life of EGGER



Eurodekor coated chipboard, energy recovery as secondary fuel is assumed. Energetic utilisation takes place in a biomass power plant. System-specific figures correspond to a European average scenario (EU28), given that the sales market of EGGER Eurodekor coated chipboard is focussed on Europe. The scenario foresees a

processing rate of the coated chipboard after removal from the building of 100%. This assumption must be adapted accordingly after using the results in the context of the building. A balance moisture of 12% must be assumed at the product's end of life. This value may fluctuate significantly depending on the storage of the product prior to energetic utilisation.

5. LCA: Results

The following table contains the LCA results for a declared unit of 1 m² average EGGER Eurodekor coated chipboard with a raw density of 11.57 kg/m² (approximately 6 % moisture).

Important remark:

EP-freshwater: This indicator has been calculated as "kg P eq" as required in the characterization model (EUTREND model, Struijs et al., 2009b, as implemented in ReCiPe; <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>).

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; ND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MNR	MNR	MNR	MND	MND	X	X	X	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 m² Eurodekor melamine faced chipboard (11.57 kg/m²)

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Global Warming Potential total (GWP-total)	kg CO ₂ eq	-1.38E+01	0	3.68E-02	1.79E+01	0	-8.83E+00
Global Warming Potential fossil fuels (GWP-fossil)	kg CO ₂ eq	3.93E+00	0	3.66E-02	9.85E-02	0	-8.8E+00
Global Warming Potential biogenic (GWP-biogenic)	kg CO ₂ eq	-1.77E+01	0	-6.11E-05	1.78E+01	0	-2.51E-02
Global Warming Potential luluc (GWP-luluc)	kg CO ₂ eq	5.66E-03	0	2.95E-04	1.43E-04	0	-8.13E-03
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC11 eq	1.25E-11	0	6.68E-18	2.17E-15	0	-1.22E-13
Acidification potential of land and water (AP)	mol H ⁺ eq	1E-02	0	1.24E-04	2.17E-04	0	6.7E-03
Eutrophication potential aquatic freshwater (EP-freshwater)	kg P eq	1.14E-05	0	1.11E-07	2.63E-07	0	-1.49E-05
Eutrophication potential aquatic marine (EP-marine)	kg N eq	3.95E-03	0	5.58E-05	4.83E-05	0	1.7E-03
Eutrophication potential terrestrial (EP-terrestrial)	mol N eq	3.54E-02	0	6.23E-04	5.07E-04	0	2.02E-02
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg NMVOC eq	7.96E-03	0	1.1E-04	1.32E-04	0	7.17E-03
Abiotic depletion potential for non fossil resources (ADPE)	kg Sb eq	2.74E-06	0	2.94E-09	2.85E-08	0	-1.83E-06
Abiotic depletion potential for fossil resources (ADPF)	MJ	8.28E+01	0	4.86E-01	1.73E+00	0	-1.72E+02
Water use (WDP)	m ³ world eq deprived	1.99E-01	0	3.55E-04	2.15E-02	0	-5.63E-01

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 m² Eurodekor melamine faced chipboard (11.57 kg/m²)

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Renewable primary energy as energy carrier (PERE)	MJ	1E+02	0	2.81E-02	1.81E+02	0	-4.33E+01
Renewable primary energy resources as material utilization (PERM)	MJ	1.84E+02	0	0	-1.8E+02	0	0
Total use of renewable primary energy resources (PERT)	MJ	2.84E+02	0	2.81E-02	7.67E-01	0	-4.33E+01
Non renewable primary energy as energy carrier (PENRE)	MJ	6.3E+01	0	4.88E-01	2.16E+01	0	-1.72E+02
Non renewable primary energy as material utilization (PENRM)	MJ	1.99E+01	0	0	-1.99E+01	0	0
Total use of non renewable primary energy resources (PENRT)	MJ	8.29E+01	0	4.88E-01	1.73E+00	0	-1.72E+02
Use of secondary material (SM)	kg	4.75E+00	0	0	0	0	0
Use of renewable secondary fuels (RSF)	MJ	1.2E+01	0	0	0	0	1.69E+02

Use of non renewable secondary fuels (NRSF)	MJ	0	0	0	0	0	1.87E+01
Use of net fresh water (FW)	m ³	1.48E-02	0	3.27E-05	8.87E-04	0	-3.5E-02

RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2:
1 m² Eurodekor melamine faced chipboard (11.57 kg/m²)

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed (HWD)	kg	2.68E-06	0	2.25E-08	7.16E-10	0	-5.82E-08
Non hazardous waste disposed (NHWD)	kg	8.74E-02	0	7.73E-05	1.23E-03	0	6.29E-03
Radioactive waste disposed (RWD)	kg	1.59E-03	0	8.99E-07	2.63E-04	0	-1.48E-02
Components for re-use (CRU)	kg	0	0	0	0	0	0
Materials for recycling (MFR)	kg	0	0	0	0	0	0
Materials for energy recovery (MER)	kg	0	0	0	1.22E+01	0	0
Exported electrical energy (EEE)	MJ	0	0	0	0	0	0
Exported thermal energy (EET)	MJ	0	0	0	0	0	0

RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional:
1 m² Eurodekor melamine faced chipboard (11.57 kg/m²)

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Incidence of disease due to PM emissions (PM)	Disease incidence	9.91E-08	0	6.99E-10	1.82E-09	0	-3.62E-08
Human exposure efficiency relative to U235 (IR)	kBq U235 eq	1.67E-01	0	1.33E-04	4.31E-02	0	-2.43E+00
Comparative toxic unit for ecosystems (ETP-fw)	CTUe	1.98E+01	0	3.63E-01	7.41E-01	0	-4.21E+01
Comparative toxic unit for humans (carcinogenic) (HTP-c)	CTUh	2.69E-09	0	7.51E-12	2.05E-11	0	-1.67E-10
Comparative toxic unit for humans (noncarcinogenic) (HTP-nc)	CTUh	3.81E-08	0	4.33E-10	7.54E-10	0	4.87E-08
Soil quality index (SQP)	SQP	4.87E+02	0	1.7E-01	5.51E-01	0	-3.16E+01

Limitation note 1 - applies to the indicator Potential effect from human exposure to U235:

This impact category mainly addresses the possible effect of low dose ionising radiation on human health in the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents and occupational exposure, nor does it consider the disposal of radioactive waste in underground facilities. Potential ionising radiation from soil, radon and some building materials is also not measured by this indicator.

Limitation note 2 - applies to the indicators Potential for Abiotic Resource Depletion - Non-Fossil Resources, Potential for Abiotic Resource Depletion - Fossil Fuels, Water Depletion Potential (User), Potential Ecosystem Toxicity Comparison Unit, Potential Human Toxicity Comparison Unit - Carcinogenic Effect, Potential Human Toxicity Comparison Unit - Non-Carcinogenic Effect, Potential Soil Quality Index:

The results of this environmental impact indicator need to be used with caution as the uncertainties in these results are high or as there is limited experience with the indicator.

6. LCA: Interpretation

The following interpretation includes a summary of the LCA results relative to a declared unit of 1 m³ average EGGER Eurodekor coated chipboard.

For the global warming potential (GWP) during the production phase (Module A1-A3) of the coated chipboard, the total is a negative value. This is due to the material use of wood in the products.


While the tree is growing, the wood stores carbon dioxide as biogenic carbon (negative greenhouse potential) and does therefore not have a greenhouse effect as long as it is stored in the product. Only upon the energy utilisation at the end of the product life cycle (Module C3) does the stored carbon leave the product system as a material-specific characteristic of the secondary fuel. The energy utilisation of scrap wood was modelled CO₂ neutral.

The negative values in Module D can be explained through the fact that the energy generated by the energetic utilisation of the product is able to replace the combustion of fossil fuels. In this way, more emissions of (mainly fossil) fuels are avoided than those emitted through the use of the energy stored in the wood.

for tropospheric ozone (POCP)) in module D arise primarily from emissions from the combustion of biomass.

Environmental impacts (acidification potential (AP), eutrophication potential (EP), formation potential

Hot-spot analysis of EGGER Eurodekor - Melamine Faced Chipboard

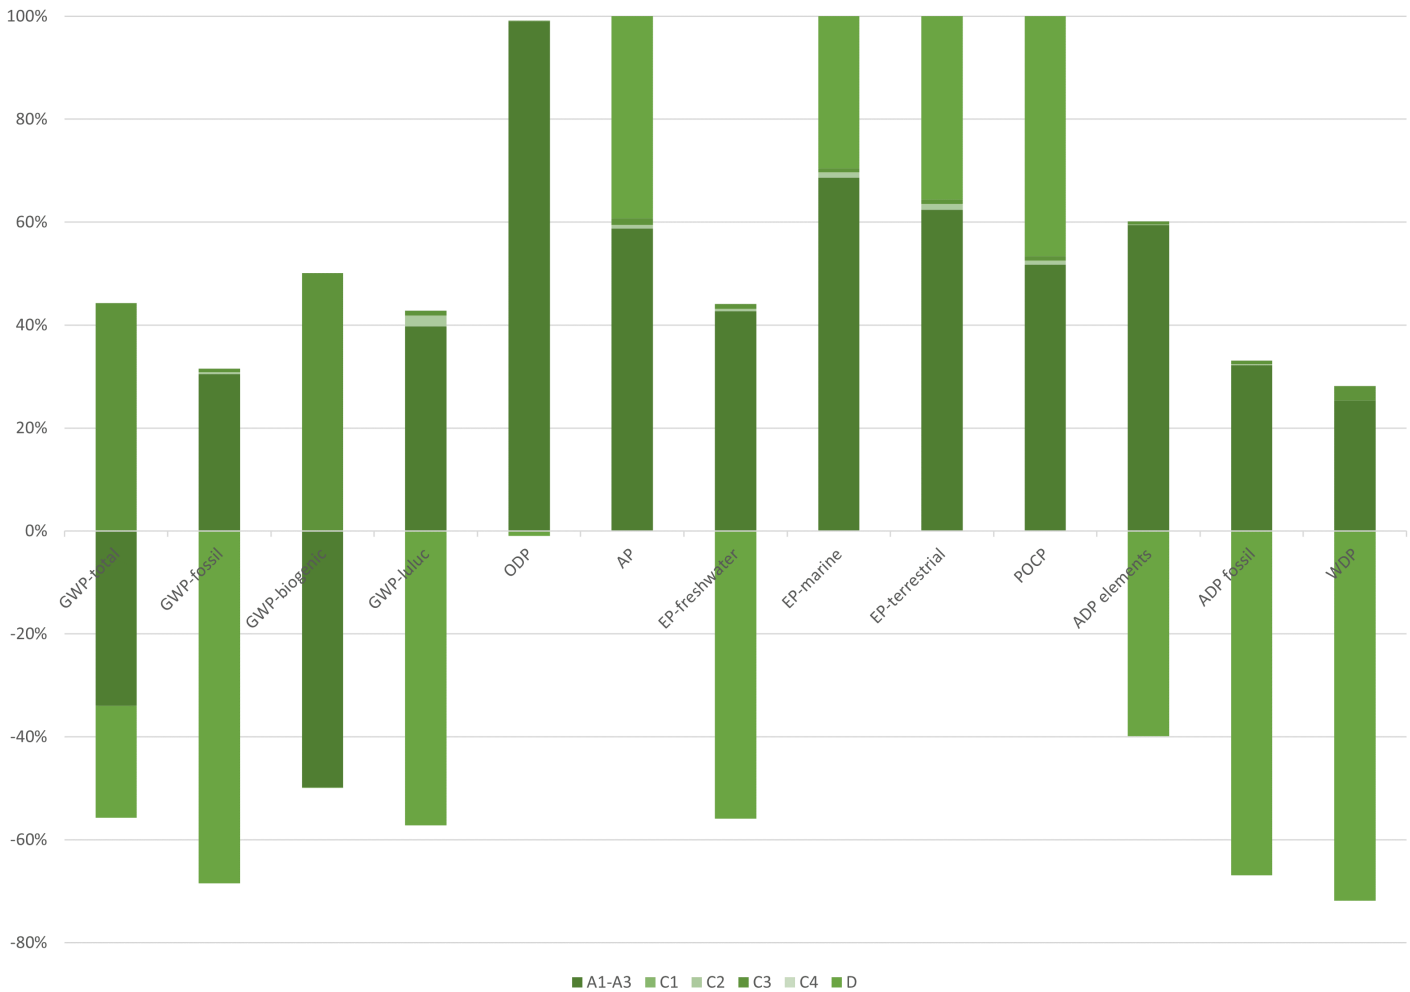

In the production of coated Eurodekor boards, the manufacture of raw chipboard and impregnation, including their upstream chains, can be identified as the most significant influencing factors in all the impact categories considered. The potential environmental impacts from the use of glue and the provision of electricity from the German grid are the most significant influencing factors in the production of raw chipboard. In the production of raw chipboard, up to 40 % of the wood input is covered by recycled wood. The waste wood for material use is included in the calculation

unencumbered, whereby the material-inherent properties of wood were taken into account accordingly. In the case of impregnation, the decorative paper as well as urea and melamine impregnation resin take on a dominant role with regard to the environmental indicators considered.

The use of renewable primary energy (PERT) is mainly due to the material use of biomass in the product. If we look at the use of non-renewable primary energy (PENRT), this is mainly used for the

production of the gluing system, the paraffin emulsion and the provision of energy from the German electricity mix.

The results of the previous EPD for EGGER Eurodekor coated chipboard (EPD-EGG-20140035-IBB1-DE) are not directly comparable with the present, updated version due to the update of the underlying methodology according to EN 15804+A2.

7. Requisite evidence

As a general rule, all statements must be documented with measured data (presented by the corresponding test certificates). The methods of evidence and the test conditions have to be described together with the results.

If substances are not detected, the limit of detection must be included in the declaration.

Interpreting statements such as "... free of ..." or "... are entirely harmless ..." are not allowed.

If evidence required by the specific PCR part B is not provided, this has to be justified under the respective title for the required evidence.

If relevant for the scope of application of the declared product, or if derivable from its material composition, it is recommended to provide additional adequate evidence.

7.1 Formaldehyde emissions

Eurodekor E1 P2 CE:

Measurement

centre: Entwicklungs- und Prüflabor Holztechnologie GmbH (EPH) Dresden

Test report: Test Report no. 2119034/BRI/2019/PB/E1-2020

Test basis: DIN EN 717-1

Result:

Measured value 0.01 ppm (240h)

Eurodekor E1E05 TSCA P2 CE

Measurement centre: Entwicklungs- und Prüflabor

Holztechnologie GmbH (EPH) Dresden

Test report: Test Report no. 2118075/2019/2/PB/E1-2020

Test basis: DIN EN 717-1

Result: Measured value 0.01 ppm (240h)

Eurodekor JP F0,3(F****)

Measurement centre: Fraunhofer-Institut für Holzforschung, Wilhelm Klauditz Institut WKI

Test report: Test Report no. QA-2019-1850

Test basis: JIS A 1460

Result: 0.2 mg/l

7.2 MDI emissions

Measurement

centre: Entwicklungs- und Prüflabor

Holztechnologie GmbH

Test reports, date: Test report no. 2520046 of 20.04.2020

Result: Determination of MDI emission from a DHF board based on *RAL-UZ 76 (02/2010)*, methods: Chamber test *EN 16516 (01/2018)*, 1st measurement after 24 h with determination limit $0.1 \mu\text{g}/\text{m}^3$, result below the determination limit. No MDI emission was detected from the tested product "coated chipboard". **7.3 Measurement in accordance with the Waste Wood Ordinance (AltholzVO)**

Measurement centre: Eurofins Umwelt West GmbH

Test basis: Continuous testing of the chipboard according to the German AltholzVO.

Result: statistical mean values of the year 2019 for the Brilon plant, own evaluation of the individual reports

PCP (pentachlorophenol): 0.4 mg/kg dry matter (limit value 3 mg/kg dry matter)

Lead: 5.1 mg/kg dry matter (limit value 30 mg/kg dry matter)

Cadmium: 0.2 mg/kg dry matter (limit value 2 mg/kg dry matter)

Arsenic: all measurements below the limit of determination (limit value 2 mg/kg dry matter)

Mercury: all measurements below the limit of determination (limit value 0.4 mg/kg dry matter)

PCB (polychlorinated biphenyls): all measurements below the limit of determination (limit value 5 mg/kg dry matter total)

Total chlorine compounds: 189 mg/kg dry matter (limit value 600 mg/kg dry matter)

Total fluorine compounds: all measurements below the limit of determination (limit value 100 mg/kg dry matter) **7.4 Toxicity of the fire gases:**

Measurement centre: epa Aachen, Division of Flue Gas Toxicology, D

Test report: No. 14/2014 of 25.06.2014

Testing method: Testing the toxic fire gases according to *DIN 4102-1* Category A at 400 °C, melamine faced board (only coating)

Results: After 30 minutes, 20,000 ppm of carbon monoxide were measured in the inhalation room. After 60 minutes, the concentrations in the inhalation room were as follows: Carbon monoxide 30,000 ppm (calculated from this > 50% COHb), carbon dioxide 15,000 ppm and hydrogen cyanide 10 ppm. Sulphur dioxide and hydrogen chloride were not detectable. The relative weight reduction at a test temperature of 400° C was 64.8 %. There was dense white smoke in the inhalation room at the end of the test. The gaseous emissions released under the selected experimental conditions correspond largely to the emissions released by wood under the same conditions. Given that the coating hasn't changed, the said test report maintains its validity. **7.5 VOC emissions**

Measurement centre: WKI Fraunhofer Wilhelm-Klauditz-Institute, testing, monitoring and certification facility, Braunschweig, DE

Test report: MAIC-2019-4079 coated chipboard E1 of 4.11.2019

Test basis: AgBB scheme 2018

Test result after 28 days: meets the requirements of the AgBB scheme

AgBB result overview (28 days [$\mu\text{g}/\text{m}^3$])

Name	Value	Unit
TVOC (C6 - C16)	≤ 1000	$\mu\text{g}/\text{m}^3$
Sum SVOC (C16 - C22)	≤ 100	$\mu\text{g}/\text{m}^3$
R (dimensionless)	≤ 1	-
VOC without NIK	≤ 100	$\mu\text{g}/\text{m}^3$
Carcinogenic Substances	≤ 1	$\mu\text{g}/\text{m}^3$

AgBB result overview (3 days [$\mu\text{g}/\text{m}^3$])

Name	Value	Unit
TVOC (C6 - C16)	≤ 300	$\mu\text{g}/\text{m}^3$
Sum SVOC (C16 - C22)	≤ 30	$\mu\text{g}/\text{m}^3$
R (dimensionless)	$\leq 0,5$	-
VOC without NIK	≤ 50	$\mu\text{g}/\text{m}^3$
Carcinogenic Substances	≤ 1	$\mu\text{g}/\text{m}^3$

8. References

Standards

ASTM E1333

ASTM E1333:2014, Standard Test Method for Determining Formaldehyde Concentrations in Air and Emission Rates from Wood Products Using a Large Chamber.

DIN 4102-1

DIN 4102-1:1998-05, Fire behaviour of building materials and elements - Part 1: Classification of building materials Requirements and testing

DIN 68800-2

DIN 68800-2:2012-02, Wood preservation - Part 2: Preventive constructional measures in buildings.

EN 310

DIN EN 310:1993, Wood-based panels - Determination of modulus of elasticity in bending and of bending strength.

EN 312

DIN EN 312:2010-12, Particleboards - Specifications.

EN 323

DIN EN 323:2005, Wood-based panels - Determination of density.

EN 324

DIN EN 324 -1:2005, Wood-based panels; determination of

dimensions of boards; Part 1: determination of thickness, width and length.

EN 717-1

DIN EN 717-1: 2005:-01, Wood-based panels - Determination of formaldehyde release - Part 1: Formaldehyde emissions according to the test chamber method.

EN 12524

EN 12524:2000-09-01, Building materials and products - Hygrothermal properties - Tabulated design values.

EN 13501-1

DIN EN 13501-1:2007-05+A1:2009, Fire classification of construction products and building elements - Part 1: classification with the results of tests on the reaction to fire of building products.

EN 13986

DIN EN 13986:2004+A1:2015, Wood-based panels for use in construction - Characteristics, evaluation of conformity and marking.

EN 14322

DIN EN 14322:2017-03, Wood-based panels

Melamine faced board for interior uses
- Definition, requirements and classification.

EN 15804

DIN EN 15804:2012+A2:2019, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products.

EN 16516

DIN EN 16516:2017, Construction products: Assessment of release of dangerous substances - Determination of emissions into indoor air.

EN 1995

DIN EN 1995-1-1:2010-12, Eurocode 5: Design of timber structures - Part 1-1: General - Common rules and rules for buildings

ISO 9001

DIN EN ISO 9001:2008-11, Quality Management Systems – Requirements.

ISO 12460

ISO 12460-5:2015, Wood-based panels — Determination of formaldehyde release — Part 5: Extraction method (called the perforator method).

ISO 14025

DIN EN ISO 14025:2011-10, Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14040

DIN EN ISO 14040:2006-10, Environmental management — Life cycle assessment — Principles and framework.

ISO 14044

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines.

ISO 15686

ISO 15686:2011-05, Buildings and constructed assets - Service life planning.

JIS A 1460

JIS A 1460:2015, Determination of the emission of formaldehyde from building boards - Desiccator method.

JIS A 5905

JIS A 5905:2003, Japanese Industrial Standard - Fibreboards.

JIS A 5908

JIS A 5908:2003, Japanese Industrial Standard - Particleboards.

RAL UZ 76

RAL-UZ 76:2016, Basic Criteria for Award of the

Environmental Label Blauer Engel: Low-Emission Panel-Shaped Materials (Construction and Furnishing Panels) for Interior Construction

Additional bibliography**Committee for Health-related Evaluation of Building Products (AgBB)**

German committee for health-related evaluation of building products (AgBB): Approach to health assessment of emissions of volatile organic compounds (VOCs and SVOCs) from building products.

BBSR Table

BBSR 2017, Useful lives of building components for life cycle analyses according to the Sustainable Building Assessment System, 2017, BBSR Germany 2017.

ChemVerbotsV

Chemicals Prohibition Ordinance, Ordinance on Prohibitions and Restrictions on the Placing on the Market and on the Supply of Certain Substances, Mixtures and Products under the Chemicals Act of 20 January 2017, last amendment of 19 June 2020 Federal Official Journal I p. 1328, 1363.

ECHA List

List of Substances of Very High Concern (SVHC) Candidate for Authorisation (ECHA Candidate List), dated 16.01.2020, published in accordance with Article 59(10) of the REACH Regulation. Helsinki: European Chemicals Agency.

EWC

European Waste Catalogue, Ordinance on the European Waste Catalogue (Waste Catalogue Ordinance - AVV), reference Federal Official Journal I 2001, 3379.

GaBi

GaBi 9, Software-System and Database for Life Cycle Engineering. DB v8.7 SP 40. Stuttgart, Echterdingen: thinkstep AG, 1992-2020. Available in: <http://documentation.gabi-software.com>.

Hasch 2002, Rüter & Albrecht 2007

Ökologische Betrachtung von Holzspan und Holzfaserplatten, Diss., Uni Hamburg revised 2007: Rüter, S. (BFH HAMBURG; Holztechnologie), Albrecht, S. (Uni Stuttgart, GaBi).

IBU 2016

Institut Bauen und Umwelt e.V.: General EPD Programme Guidance of the Institut Bauen und Umwelt e.V. (IBU). Version 1.1, Berlin: Institut Bauen und Umwelt e.V., 2016. www.ibu-epd.com.

PCR Part A

Product category rules for building-related products and services. PART A: Calculation rules for the ecological balancing and requirements towards the project report according to EN 15804+A2:2019. Version 1.0. Berlin: Institut Bauen und Umwelt e.V. (eds.), 2020.

PCR:
Holzwerkstoffe

VI to the Toxic Substances Control Act (TSCA) - 'TSCA Title VI',
para 40 CFR §
770.10 (b).

Product category rules for
building-related products and services. PART B: Requirements
of EPD wood-based materials. Version 1.1. Berlin:
Institut Bauen und Umwelt e.V., 12.2018.

**Rüter &
Diederichs 2012**

Ökobilanz-Basisdaten
für Bauprodukte aus Holz. Arbeitsbericht aus dem Institut für
Holztechnologie
und Holzbiologie Nr. 2012/1. Hamburg: Johann Heinrich
von Thünen-Institut.

TSCA Title VI

US EPA 40 CFR Part 770
"Formaldehyde Emission Standards for Composite Wood
Products", Title

The literature referred to in the Environmental Product
Declaration must be listed in full. Standards already fully quoted
in the EPD do not need to be listed here again.
The current version of PCR Part A and PCR Part B of the PCR
document on which they are based must be referenced.



Publisher

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com



Programme holder

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com



Author of the Life Cycle Assessment

Daxner & Merl GmbH
Lindengasse 39/8
1070 Wien
Austria

+43 676 849477826
office@daxner-merl.com
www.daxner-merl.com



Owner of the Declaration

Fritz EGGER GmbH & Co. OG
Weiberndorf 20
6380 St. Johann in Tirol
Austria

+43 (0)50 600-0
info-sjo@egger.com
www.egger.at